

FLEXIBLE ACOUSTIC NOISE BARRIER

WAVEBAR AND QUADZERO RANGE



BUILDING - INDUSTRIAL - TRANSPORT - MARINE - OIL & GAS



SOUNDPROOFING SOLUTIONS FOR ALL INDUSTRIES
pyroteknc.com


Pyrotek.



BETTER FLEXIBILITY, EASY TO INSTALL



MASS LOADED VINYL FOR ALL INDUSTRIES

The mass loaded vinyl (MLV) range has been uniquely developed by Pyrotek's world class engineering team. Offering superior acoustic transmission loss - Wavebar® and Quadzero™ are flexible reinforced noise barrier solutions that meet global market requirements in all industries including building, industrial, transport, marine and oil & gas.

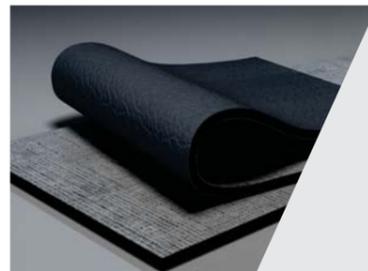

Wavebar® is a reinforced MLV noise barrier designed by Pyrotek to meet market requirements and effectively reduce noise transmission. Due to its flexible and tear resistant properties, Wavebar is suitable for various applications across all industries, such as building, commercial, industrial and transport. Wavebar will help improve performance of a lightweight partition at critical frequencies.

Quadzero™ is a flame resistant foil faced MLV offering superior acoustic transmission loss with high flame retardant properties. The reflective foil facing provides a low spread of flame surface covering for areas where higher fire specifications are required. Additionally, the dense, thin and strong physical characteristics make Quadzero suitable for building, industrial, transport and OEM sectors. It is also highly suitable for Liquid Natural Gas (LNG) pipe application.



Wavebar® NC

Wavebar® NC is a tear resistant noise barrier curtain with high tensile strength. The tarpaulin base fabric facing is used to withstand tough weather conditions in addition to being UV resistant. Able to withstand exposure to most chemicals and solvents, Wavebar NC is easy to hang or drape in long lengths – being the ideal choice for outdoor use, oil and gas industries and construction sites. It can also be combined with absorption materials, offering versatility in challenging noise environments. The tarpaulin base fabric facing is available in various colours.

Quadzero™ NL is a foil faced barrier that is formulated to achieve the highest fire rating as an acoustic surface covering. It is durable, flexible and tear resistant, with a strong base fabric. This product offers optimum noise transmission loss with fire testing results that complies with international marine and rail standards. Quadzero NL is suitable for marine and rail carriages in walls, ceilings and under floor insulation, as it contains no ozone depleting substances, lead, unrefined oils or bitumen.



Quadzero™ NL



Wavebar® dBX

Wavebar® dBX is the latest alternative in noise barrier technology manufactured from thermoplastic recycled polymers. A self-extinguishing and low smoke emission noise barrier, Wavebar® dBX provides high-performance acoustic insulation that can be vacuum formed and easily moulded. This product is 100% recyclable and recommended for transport, building and industrial applications due to its strong characteristics.

Quadzero™ dBX is a MLV laminated with reinforced aluminium foil, manufactured from thermoplastic recycled polymers that exhibits superior transmission loss. Meeting international standards for rail, transport and marine, Quadzero dBX has high fire resistant properties, a low spread of flame surface and low smoke development. This product is suitable for marine, transport and rail applications. Quadzero™ dBX is 100% recyclable.



Quadzero™ dBX


Our Wavebar® and Quadzero™ range perform an important role as high-performance barriers where noise transmission issues need to be addressed. Typically stiff lightweight panels such as plasterboard, drywall, plywood and hollow core walls have a coincidence dip. A coincidence dip is the frequency at which the stiff panel vibrates in unison with the frequency of sound pressure waves. The frequency of the coincidence dip is dependent on the material's stiffness and internal damping properties causing a degradation in transmission loss. The Wavebar® and Quadzero™ range will eliminate the impact of the coincidence dip when installed in a structure, rendering it as a highly effective noise barrier.

TESTED TO A RANGE OF GLOBAL FIRE STANDARDS


Wavebar® is weather resistant, contains no ozone depleting substances and complies with International standards for Volatile Organic Compound (VOC) emissions.

IDEAL NOISE BARRIER SOLUTIONS FOR ALL MARKETS

Building and Commercial

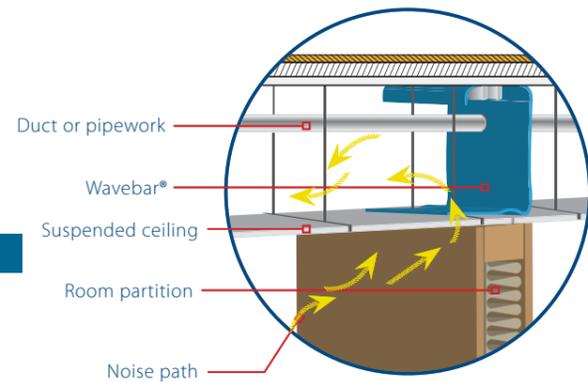

Wavebar® and Wavebar® DBX fitted in the plenum space above suspended ceilings and partition walls to avoid flanking noise.

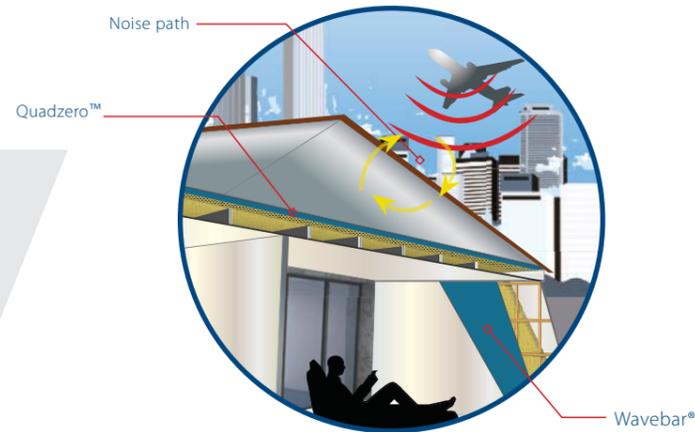

Quadzero™ is suitable for ceiling cavities due to its reflective and low spread of flame surface covering. Wavebar® fitted between plasterboard walls for greater transmission loss. Improves performance at critical frequencies generated from urban and environmental noise impact.




Transport

Quadzero™ NL and Quadzero™ dBX will effectively control sound transfer from external track, rail or engine noise into cabins and carriages. This durable product can be used without impacting carriage safety providing additional comfort to passengers.


Marine

Quadzero™ NL and Quadzero™ dBX can be installed in the wall linings, deckheads and bulkheads of marine vessels to reduce sound transmission emitting from the vessel engine room.



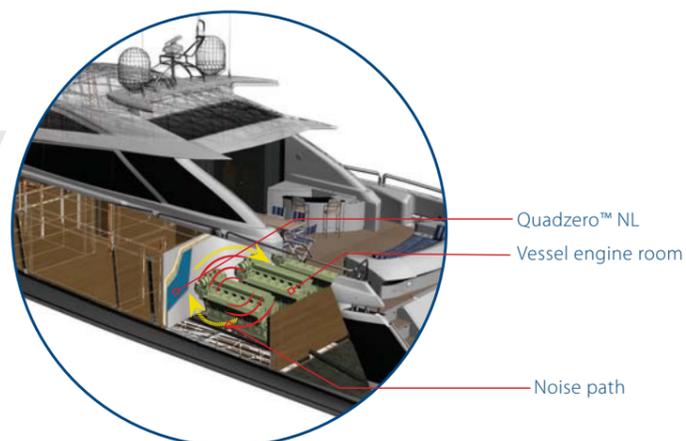


Industrial

Wavebar® NC can be conveniently draped over fencing as an acoustic barrier to reduce noise transmission around construction sites, building sites and mobile equipment.

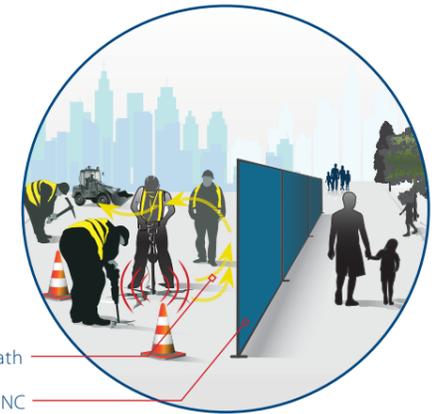

Wavebar® NC can be easily fabricated and sewn to make custom enclosures to reduce noise transfer from generator sets, plant rooms, printing machines and other heavy equipment.

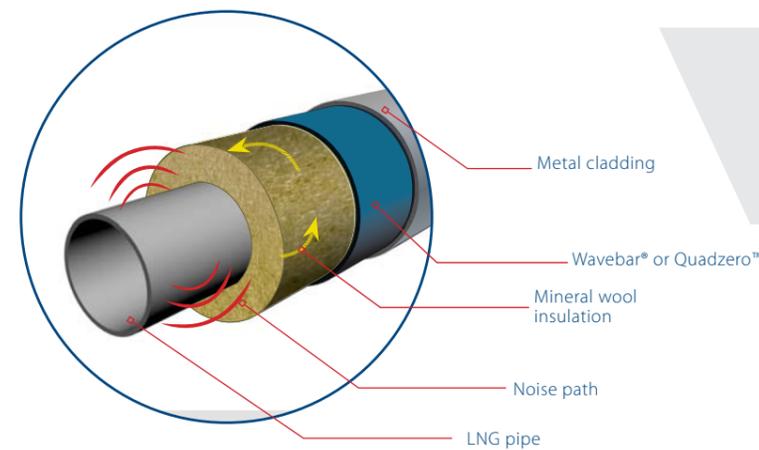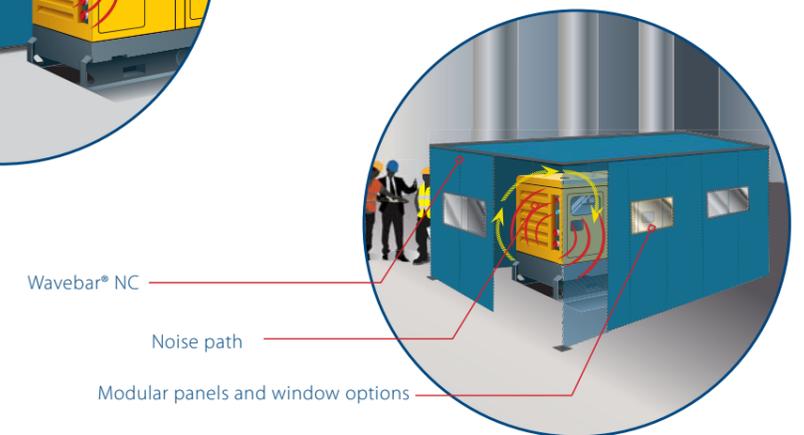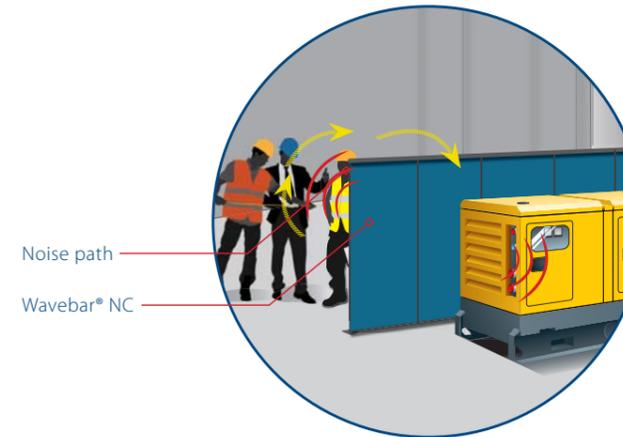

LNG Pipes

Lagged around pipes, Wavebar® & Quadzero™ are important for LNG (Liquid Natural Gas) pipe applications to prevent noise breakout.

Wavebar® complies to the ISO 15665 (Group 2 Pipe size) test method.

Pyrotek's Wavebar® & Quadzero™ range are available in various weights, widths, roll lengths and sheet sizes. Our MLV products are simple to cut and easy to install.



APPLICATIONS



Suited across a variety of applications, the mass loaded vinyl range offers superior acoustic transmission loss and complies to a range of international fire codes benefiting the following areas:

PRODUCT

TYPICAL AREAS OF USE

Wavebar®

- Home theatre and office partitions
- Inside cavities, over lightweight walls and ceilings
- Between the plenum chamber of a slab, the roof and adjoining partition walls

Wavebar® NC

- Noise curtain for indoor/outdoor industrial and construction sites
- Enclosures for industrial equipment e.g. generators, engine rooms, punch presses

Wavebar® dBX

- Automotive cabin
- Heavy transport and machinery
- Acoustic doors

Quadzero™

- Building construction
- LNG Pipes
- Roof cavities

Quadzero™ NL

- Train and tram carriages
- Marine deckheads and bulkheads
- Marine engine room

Quadzero™ dBX

- Train and tram carriages
- Marine engine room deck
- Inside cavities or over lightweight walls, ceilings and floor constructions

FEATURES

- Flexible and easy to install
- Isolate cavities, over lightweight walls and ceiling constructions
- Reinforced fabric strength
- Can be designed as a partial or complete enclosure around noise sources
- Manufacturing options with stainless steel eyelets and hook-and-loop fasteners
- Portable acoustic curtain easily draped over fencing
- Low smoke emission - contains no ozone depleting substances
- Can be easily moulded into linings
- Thermoplastic properties
- Fire resistant foil properties
- Suitable for use with LNG pipes
- Reflective foil faced surface
- Highest flame retardant properties
- Self-extinguishes upon removal of flame
- Aluminium foil faced surface
- Flame retardant properties
- Reinforced aluminium facing
- Suitable for use where thermoplastic materials are required

BENEFITS

- Reduces noise transfer through lightweight partition walls and ceilings
- Reduce cross-talk noise and ensure privacy
- Longevity
- Curtains are durable and address environmental noise impact
- Customised for unique purposes and difficult sites
- Reduce noise transmission around construction areas and mobile equipment on site
- Safe and self-extinguishes in heavy vehicle, road/engine bay
- 100% recyclable
- Rail carriage will hold its integrity for longer in case of emergency
- Acts as a noise and vapour barrier
- Joins are easily taped for quick installation
- Free from lead, odour producing oils and bitumen
- Suitable for use in high risk areas including marine & offshore
- Meets international marine & rail standards
- Used where high fire standards are required
- Durable with low spread of flame
- 100% recyclable
- Aluminium faced materials can be easily joined using foil tape

With over 40 years of noise control experience, Pyrotek® is a well trusted name for performance improving technical solutions.



pyroteknc.com

PYROTEK
WORLDWIDE LOCATIONS

AUSTRALIA
CANADA
CHINA
CZECH REPUBLIC
HONG KONG
INDIA
INDONESIA
JAPAN
KOREA
MALAYSIA
SINGAPORE
NEW ZEALAND
TAIWAN
THAILAND
TURKEY
UNITED ARAB EMIRATES
UNITED KINGDOM
UNITED STATES OF AMERICA
VIETNAM

CONTACT DETAILS
for further information please visit our website at pyroteknc.com

Pyrotek endorse forest sustainability and the preservation of natural environment. We procure the highest quality materials from suppliers who hold FSC (Forest Stewardship Council) Certification and PEFC (Programme for the Endorsement of Forestry Certification) amongst other certification programmes.

Caveats: Specifications are subject to change without notice. The data in this document are typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic or mechanical engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See pyroteknc.com/disclaimer.

PYROTEK - WAVEBAR AND QUADZERO RANGE 06.2017