



BY SIGNATURE®



OSLO

DESIGN CREATED FOR PEOPLE

BY SIGNATURE®





# NORSE

NATURE'S DELICATE COLOUR PALETTE

NORSE 600







SKANDI 100 NORSE 100 ULTIMATE CASABLANCA OAK 24983



OSLO

MUTED TONES

& EXPRESSIVE TEXTURES



# SKANDI

NATIVE PATTERNS FOR A MODERN WORLD

SKANDI 300



*Signature*





# MALMO

A REFLECTION OF OUR OUTSIDE WORLD

MALMO 700 ULTIMATE SUMMER OAK 24219




OSLO

THE HARMONY OF CO-ORDINATING TEXTURES

SKANDI 400 MALMO 400 NORSE 400



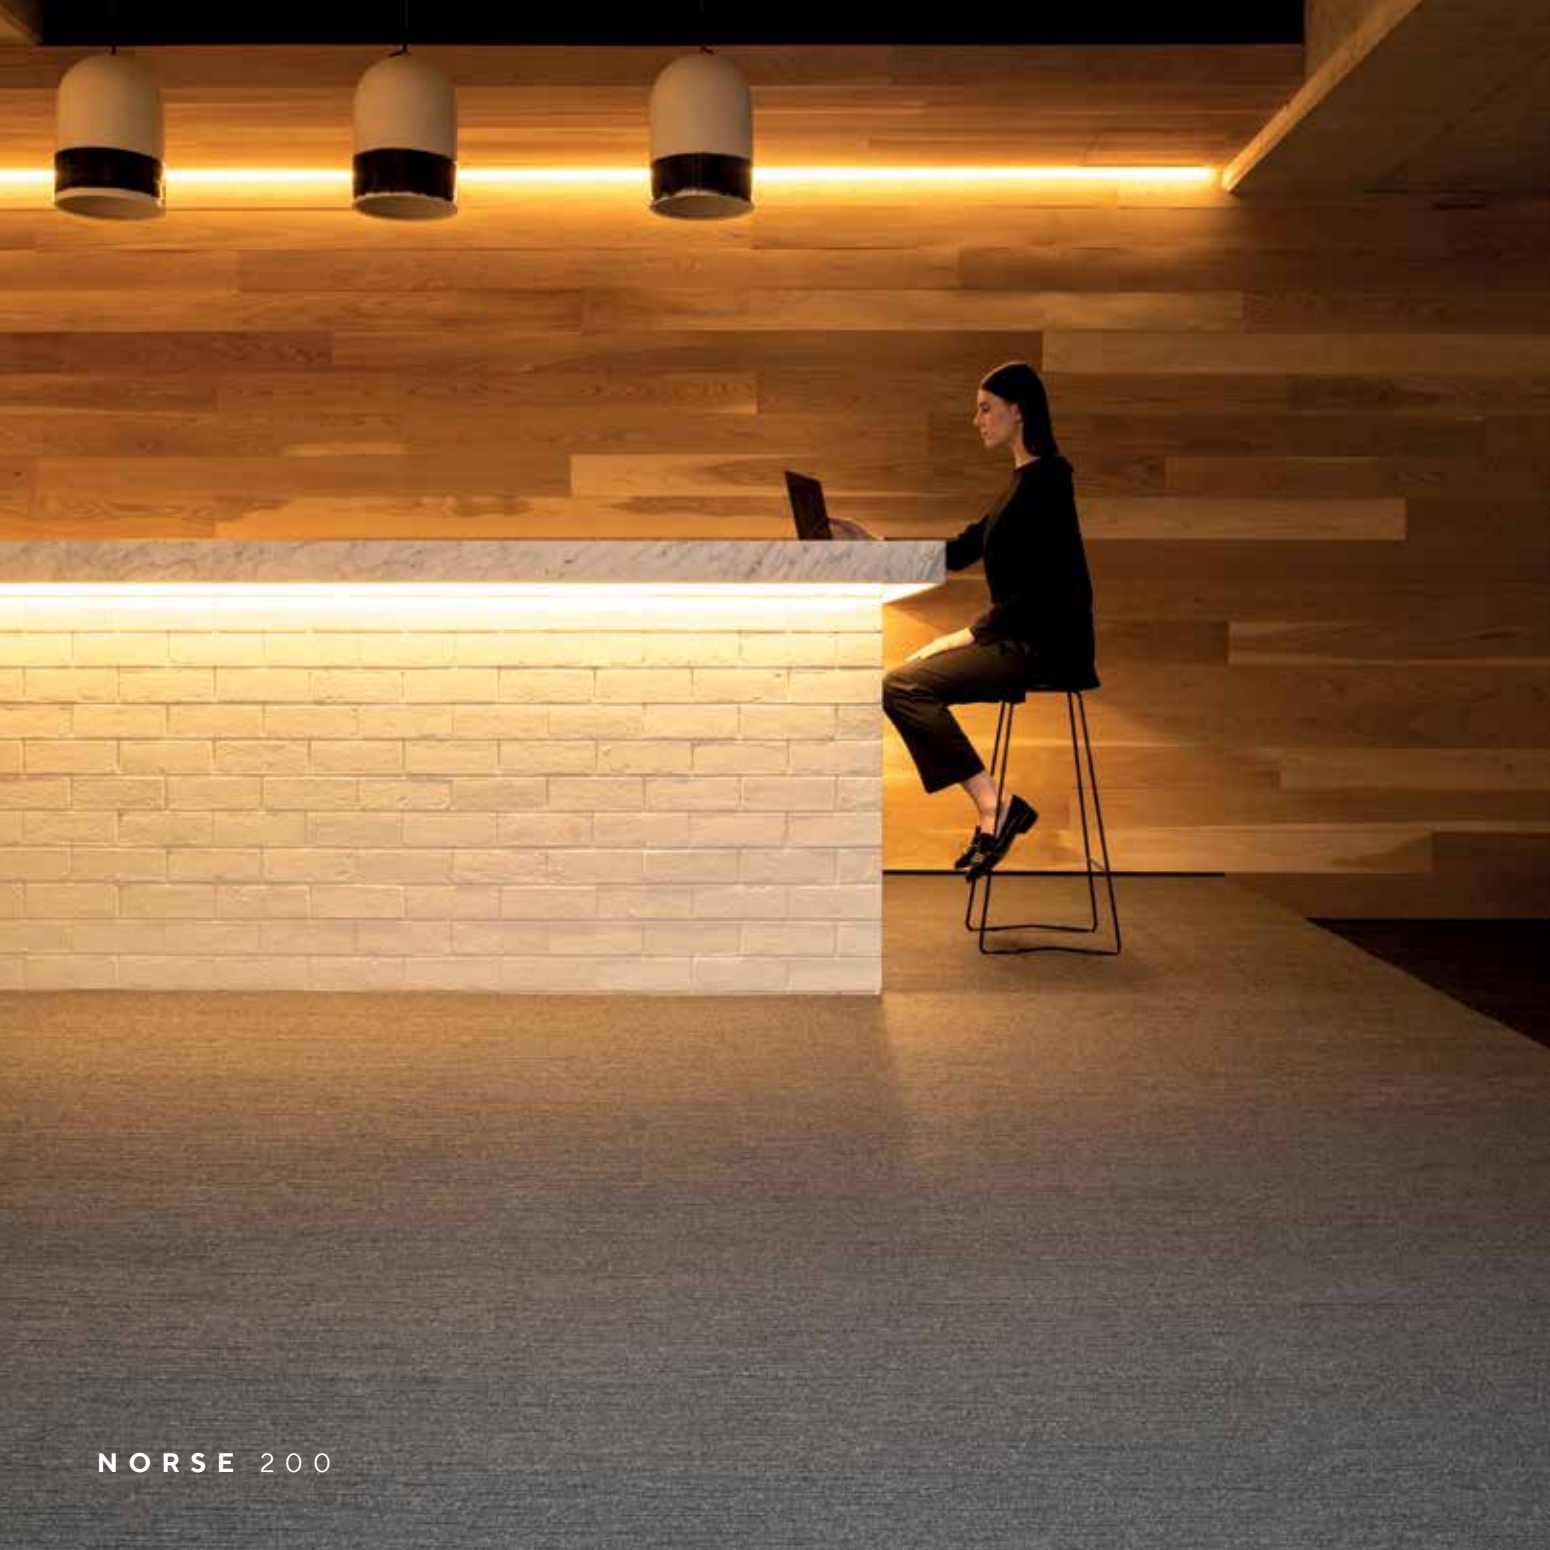

NORSE 200

NORSE

A NORDIC LANDSCAPE AT DAWN











SEEKING **ADDED COMFORT?**

OSLO CAN BE ORDERED  
IN COMFI BAK® BY SIGNATURE

ACOUSTIC PERFORMANCE -  
THERMAL BENEFIT -  
COMFORT UNDERFOOT -

\* 100M<sup>2</sup> MINIMUM ORDER APPLIES



SKANDI

NORSE

SKANDI TROSA 100	SKANDI TOVA 200	SKANDI TORI 300	SKANDI ODENSE 400	SKANDI IDDA 500	SKANDI TALE 600	SKANDI NATTI 700	SKANDI WINIE 800	SKANDI FLEN 900	NORSE DYLAN 100	NORSE JAX 200	NORSE OSKAR 300	NORSE ESKEL 400	NORSE STEN 500	NORSE LARZ 600	NORSE LUND 700	NORSE SOREN 800	NORSE RAE 900



THINKING OUTSIDE THE PLANK?

OSLO CAN BE ORDERED  
IN SHAPES™ BY SIGNATURE MODULAR SHAPES:

- RIGHTANGLE
- PENTAGON
- RECTANGLE
- HEXAGON
- TRAPEZOID
- TRIANGLE
- SQUARE

\* 100M<sup>2</sup> MINIMUM ORDER APPLIES

MALMO



MALMO ZAIDE 100 MALMO JETTE 200 MALMO NIRI 300 MALMO MAJA 400 MALMO KARLA 500 MALMO RAKEL 600 MALMO ANNELI 700 MALMO GALA 800 MALMO DANA 900

<b>product</b> <b>construction</b> <b>yarn/fibre</b> <b>pile weight</b> <b>pile height</b> <b>gauge</b> <b>plank size</b> <b>total thickness</b> <b>carton size</b> <b>total weight</b> <b>dimensional stability</b> <b>backing</b> <b>electrostatic propensity</b> <b>fire rating ISO 9239.1</b> <b>recommended adhesive</b> <b>installation method</b> <b>co-ordinates with</b>	<b>malmo</b> high loop, low cut solution dyed nylon 850g/m <sup>2</sup> 4mm 1/10" 250mm x 1000mm 7.5mm 5m <sup>2</sup> 5.2kg/m <sup>2</sup> <0.15% Thermo Bak™ <3.0kv >4.5kw/m <sup>2</sup> critical radiant flux RLA Polymers GS300 ashlar, herringbone all Signature planks	<b>norse</b> high loop, low cut solution dyed nylon 850g/m <sup>2</sup> 4mm 1/10" 250mm x 1000mm 7.5mm 5m <sup>2</sup> 5.2kg/m <sup>2</sup> <0.15% Thermo Bak™ <3.0kv >4.5kw/m <sup>2</sup> critical radiant flux RLA Polymers GS300 ashlar, herringbone all Signature planks	<b>skandi</b> high loop, low cut solution dyed nylon 850g/m <sup>2</sup> 4mm 1/10" 250mm x 1000mm 7.5mm 5m <sup>2</sup> 5.2kg/m <sup>2</sup> <0.15% Thermo Bak™ <3.0kv >4.5kw/m <sup>2</sup> critical radiant flux RLA Polymers GS300 ashlar, herringbone all Signature planks
<b>Comfi Bak® option*</b> <b>customise Shapes*</b> <b>traffic</b> <b>warranty</b> <b>fire</b> <b>GreenStar</b> <b>availability</b>	100m <sup>2</sup> min 100m <sup>2</sup> min extra heavy duty commercial 15 year limited suitable all areas GreenTag® Certified in stock	100m <sup>2</sup> min 100m <sup>2</sup> min extra heavy duty commercial 15 year limited suitable all areas GreenTag® Certified in stock	100m <sup>2</sup> min 100m <sup>2</sup> min extra heavy duty commercial 15 year limited suitable all areas GreenTag® Certified in stock



Our manufacturing process ensures no two planks are the same.  
Please note that there may be batch variations from different dye lots.  
**\*Comfi Bak® - optional backing for enhanced comfort. 100m<sup>2</sup> minimum order applies.**  
**\*Available in Shapes by Signature®. 100m<sup>2</sup> minimum order applies.**

